



MANTA

SPORT BAND

Model:

SWT302



Instrukcja obsługi
User's Manual

Instrukcja obsługi

Przeczytaj przed rozpoczęciem użytkowania tego sprzętu.

INFORMACJE FCC

Niniejsze urządzenie zostało przetestowane i stwierdzono jego zgodność z limitami dla urządzeń cyfrowych klasy B, zgodnie z częścią 15 przepisów FCC.

Urządzenie to generuje, używa i może emitować energię o częstotliwości radiowej i jeśli nie jest używane zgodnie z instrukcjami, może powodować zakłócenia komunikacji radiowej. Nie ma jednak gwarancji, że poprawne używanie urządzenia nie spowoduje zakłóceń w działaniu konkretnej instalacji.

Jeśli urządzenie powoduje szkodliwe zakłócenia radiowe lub telewizyjne, co można sprawdzić przez włączenie urządzenia, użytkownik może spróbować skorygować zakłócenia, poprzez:

- ✓ zmianę orientacji lub położenia anteny odbiorczej,
- ✓ zwiększenie odległości między urządzeniem a odbiornikiem,
- ✓ podłączenie urządzenia do gniazdka z obwodu innego niż ten, do którego podłączony jest odbiornik.
- ✓ zasięgnięcie porady osób mających doświadczenie w rozwiązywaniu problemów dotyczących urządzeń RTV.

LOKALIZACJA KONTROLEK

OLED display --> Wyświetlacz OLED

Current Time --> Aktualny czas


PM Indicator --> Wskaźnik PM

Month/Day --> Miesiąc/dzień

Battery Power Meter -> Miernik mocy baterii

Mode Button --> Przycisk zmiany trybu


Watch Strap --> Pasek

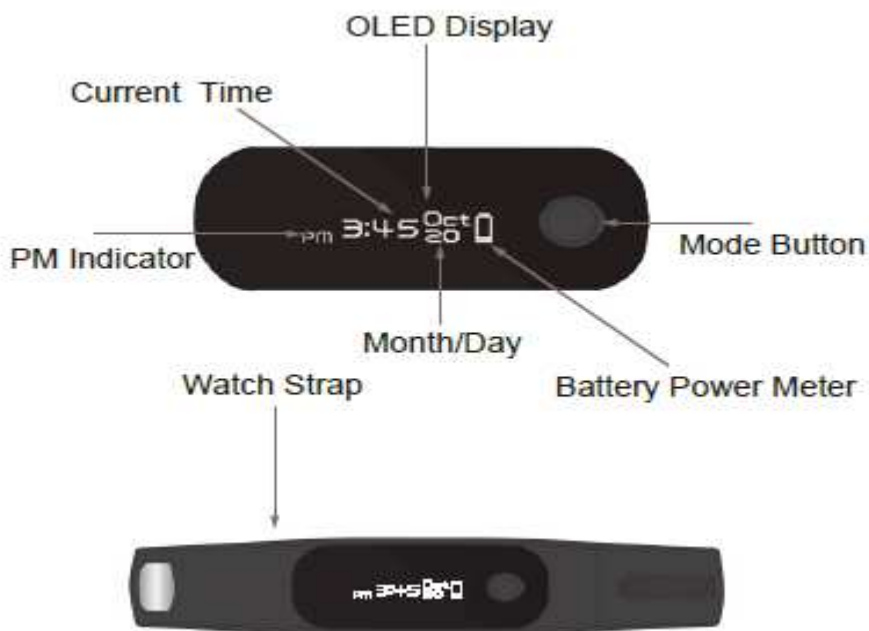

UWAGA:

Aby włączyć urządzenie po raz pierwszy, naciśnij i przytrzymaj przycisk zmiany trybu, aż wyświetlacz zostanie włączony.

ŹRÓDŁO ZASILANIA

Urządzenie posiada wbudowany akumulator Li-poly o napięciu 3,7 V DC. Przed pierwszym użyciem oraz gdy się wyczerpie (o czym informuje ikona ) , naładuj go w następujący sposób:


1. Wyjmij urządzenie z paska, tak jak przedstawiają to poniższe ilustracje:

A. Wyciągnij urządzenie z paska ze strony klamer metalowych, tak jak ilustrują to rysunki A i B poniżej:

B. Wyjmij urządzenie całkowicie, jak ilustruje to rysunek C poniżej:

**UWAGA:**

Upewnij się, że wyciągasz urządzenie w odpowiednim kierunku. W przeciwnym razie zarówno urządzenie jak i pasek mogą ulec uszkodzeniu.

2. Włóż wtyk USB do portu USB komputera lub ładowarki USB o wyjściu 5V DC, jak ilustruje to rysunek poniżej. Upewnij się, że urządzenie umieszczone jest w odpowiednią stronę (złożonymi wtykami w stronę aktywną złącza USB). Ładowanie rozpocznie się automatycznie. Podczas ładowania wskaźnik ładowania  pojawi się na wyświetlaczu. Po zakończeniu ładowania, na wyświetlaczu wyświetlony zostanie napis „FULL”, informujący o pełnym naładowaniu baterii.

**Uwagi:**

Zapewnisz akumulatorowi dłuższą żywotność, jeśli będziesz stosować poniższe proste zasady ładowania i przechowywania:

- A. Ładuj i przechowuj go w zakresie temperaturowym między 5°C a 35°C (od 40°F do 95°F).
- B. Nie ładuj go zbyt długo (dłużej niż 24 godziny). Nadmierne ładowanie i rozładowywanie akumulatora może skrócić jego żywotność.
- C. Pojemność akumulatora ulega z czasem naturalnemu skróceniu.
- D. Samodzielne wymienianie przez użytkownika akumulatora w tym urządzeniu nie jest zalecane.

INSTALACJA APLIKACJI

Przed pierwszym użyciem, pobierz i zainstaluj odpowiednie aplikacje.

iPhone:

Jeśli używasz Apple iPhone, pobierz i zainstaluj w telefonie aplikację „Isport Tracker” z iPhone APP Store, do którego link znajdziesz w sekcji APP Twojego iPhone’a.

Telefony z systemem Android:

Jeśli używasz telefonu działającego pod kontrolą systemu Android, pobierz i zainstaluj w telefonie aplikację „Isport Tracker” ze sklepu Google Play.

Lista kompatybilnych telefonów

iPhone (iOS 7.0.0 i nowsze)

iPhone 4S/5/5S/6/6 plus

iPod Touch 5

oraz nowsze wersje iPhone i iPod

Telefony z systemem Android (Android 4.3 i nowsze):

Samsung: Galaxy S4/S5, Note III/IV

LG: Nexus4/5/7

Sony: Xperia C3/E3/T2/ZR/SP/Z/Z1

Moto: E/G/X

oraz nowsze wersje telefonów innych marek obsługiwanych przez systemem Android;

szczegółowe informacje uzyskasz w każdym sklepie z telefonami komórkowymi.

CZYNNOŚCI

TELEFON Z SYSTEMEM ANDROID: PAROWANIE BT (BLUETOOTH):

Przy pierwszym włączeniu funkcji Bluetooth, urządzenie i telefon komórkowy należy sparować w następujący sposób:

1. Po zakończeniu instalacji aplikacji „Isport Tracker”, znajdź ją w telefonie. Otwórz ją. Na ekranie wyświetlona zostanie następująca okno:



2. Aby ustawić swoje dane osobowe naciśnij na odpowiednią pozycję i podaj odpowiednią wartość:
 - ✓ Profile (zdjęcie): Tu możesz wprowadzić zdjęcie użytkownika.
 - ✓ Age (wiek): Ustaw lub zmień wiek użytkownika.
 - ✓ Gender (płeć): Ustaw lub zmień płeć użytkownika.
 - ✓ Height (wzrost): Ustaw lub zmień wzrost użytkownika
 - ✓ Weight (waga): Ustaw lub zmień wagę użytkownika

- ✓ Time zone (strefa czasowa): Ustaw strefę czasową, w której przebywasz


- ✓

UWAGA:


Po zapisaniu strefy czasowej, wszystkie dane zapisywane będą w tej strefie nawet, jeśli zapisywane były w innych strefach. Zmienić strefę czasową można wyłącznie poprzez odinstalowanie aplikacji z telefonu, a następnie ponowną jej instalację.


3. Po zakończeniu wprowadzania danych, naciśnij przycisk „**Confirm**” (Zatwierdź) znajdujący się w prawym górnym rogu ekranu, aby zapisać wprowadzone ustawienia. Spowoduje to wyświetlenie następującego ekranu:



4. Aby wejść do menu ustawień, naciśnij ikonę  (lub swoje własne zdjęcie/grafikę – jeśli zostały one uprzednio zapisane w ustawieniach). Wyświetlony zostanie następujący ekran:




5. Dotknij przycisku parowania Bluetooth **BT Pairing**  aby wyświetlić wszystkie dostępne urządzenia. Spowoduje to wyświetlenie następującego ekranu:

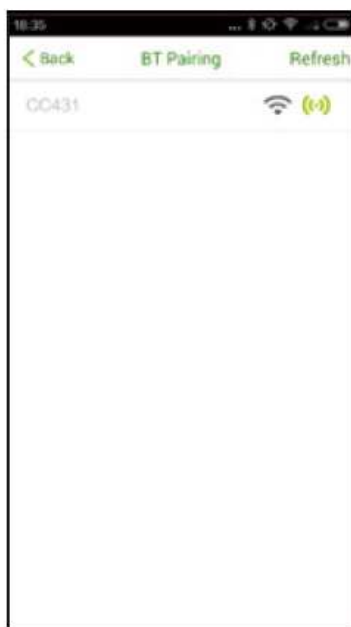

6. Na głównym ekranie aplikacji przesunij ekran w dół, aby rozpocząć parowanie urządzeń.

Po zakończeniu parowania, dotknij przycisk „<back”. Spowoduje to wyświetlenie następującego ekranu.

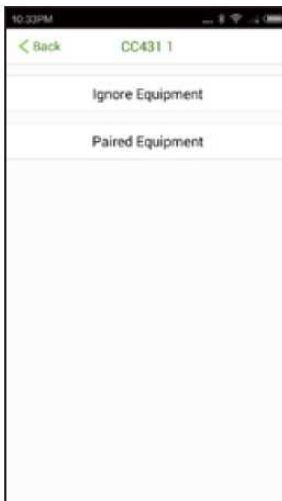

Uwaga: Jeśli telefon znajdzie więcej niż jedno urządzenie, kolejnym urządzeniom nadaje automatycznie kolejny numer w nazwie. Czyli pierwsze z urządzeń zostanie oznaczone jako „SWT302 1”, drugie jako „SWT302 2” itd.

Wybierz na ekranie to z urządzeń, które chcesz z telefonem sparować.

7. Na ekranie telefonu dotknij przycisk “Paired Equipment” lub swoje własne zdjęcie/grafikę – jeśli zostały one uprzednio zapisane w ustawieniach), a następnie przycisk „**Activity tracker**” (monitor aktywności), wyświetlony wówczas zostanie następujący ekran.



WAŻNE:

Podczas synchronizacji upewnij się, że wyświetlacz opaski monitorującej jest podświetlony.

Jeśli nie jest, kliknij przycisk zmiany trybu (Mode), aby włączyć go ponownie.

8. Na ekranie telefonu wybierz urządzenie **SWT302**. Wyświetlony zostanie następujący ekran.

Aby nadać ustawieniom odpowiednie wartości, dotknij właściwy przycisk na ekranie i wprowadź swoje dane. Funkcje poszczególnych ustawień przedstawione są na liście poniżej:



9. Po wprowadzeniu ustawień, dwukrotnie dotknij przycisk „<Back”, aby powrócić do strony głównej.

10. Na stronie głównej przesun obraz w dół, aby rozpocząć synchronizację. Po zakończeniu synchronizacji, bieżący czas telefonu będzie automatycznie przesyłany do opaski monitorującej.

SPRAWDZANIE I ODCZYT DANYCH

Po wykonaniu ćwiczeń, możesz sprawdzać odczytywać dane w następujący sposób:

Urządzenie monitorujące:

1. Naciskaj przycisk zmiany trybu **Mode** urządzenia, aby odczytać kolejne dane:

Time → Czas

Number of steps → Liczba kroków

Burned calorie → Liczba spalonych kalorii

Distance → Odległość

Exercise Time → Czas treningu

Goal completed meter → Poziom realizacji celu

Goal completed meter in % → Poziom realizacji celu w procentach

Alarm → Alarm

Reminder for no motions → Przypomnienie o zasiedzeniu

Name and Phone number for incoming call (Operation in Android phones only) →

Nazwa i numer telefonu dla połączeń przychodzących (tylko dla telefonów z systemem Android)

Numbers of missing calls (Operation in Android phones only) → Liczba

nieodebranych połączeń telefonicznych (tylko dla telefonów z systemem Android)

Unread messages (Operation in Android phones only) → Liczba nieprzeczytanych wiadomości (tylko dla telefonów z systemem Android)

Telefon:

1. Naciśnij przycisk zmiany Trybu na urządzeniu, aby włączyć wyświetlacz. Sparuj urządzenie z telefonem, jak w procedurze poprzedniej.
2. Po sparowaniu urządzenia z telefonem otwórz stronę główną aplikacji. Na ekranie telefonu wyświetlone zostanie następujące okno.
3. Przesuń obraz w dół telefonu, aby rozpocząć synchronizację.

WAŻNE:

Podczas synchronizacji upewnij się, że wyświetlacz opaski monitorującej jest podświetlony.

Jeśli nie jest, kliknij przycisk zmiany trybu (Mode), aby włączyć go ponownie.

4. Po zsynchronizowaniu urządzeń naciśnij przycisk korespondencji na ekranie telefonu lub przesunij obraz w lewo, prawo lub w dół, aby odczytać zapisane przez opaskę dane.

MONITOROWANIE SNU

Aby zliczać i monitorować czas snu:

1. Idąc spać naciśnij przycisk zmiany trybu na opasce monitorującej, aby włączyć wyświetlacz.
2. Naciśnij przycisk zmiany trybu ponownie, aby wyjść z ekranu godziny.
(Uwaga: aby uniknąć przypadkowego włączenia monitora snu, nie może on być ustawiony w podstawowym trybie wyświetlania czasu)
3. Naciśnij i przytrzymaj przycisk zmiany trybu około 5 sekund w celu przejścia w tryb monitorowania snu. Na wyświetlaczu opaski wyświetlone zostaną następujące ikony. A monitor snu zostanie włączony.



4. Po obudzeniu, kliknij przycisk zmiany trybu na opasce, aby włączyć wyświetlacz.
5. Naciśnij przycisk zmiany trybu ponownie, aby wyjść z trybu wyświetlania czasu.
6. Naciśnij i przytrzymaj przycisk zmiany trybu przez około 5 sekund, aby opuścić tryb monitorowania snu. Na wyświetlaczu opaski wyświetlone zostaną następujące ikony



7. Po kilku sekundach wyświetlacz wróci do podstawowego trybu wyświetlania czasu.

WAŻNE

1. Po wprowadzeniu zmian zawsze synchronizuj urządzenia, gdyż dopiero wówczas zmiany zostaną zapisane na urządzeniu sparowanym z telefonem.
2. Opaskę monitorującą zakładaj na rękę i pamiętaj, aby ją włączyć. Inaczej dane będą niepoprawne lub nie zostaną zebrane.
3. W trybie monitorowania snu licznik kroków nie działa.
4. Pamiętaj, aby synchronizować dane z opaski z telefonem. W przeciwnym razie dane zapisane przez opaskę po 14 dniach zostaną usunięte automatycznie

SPECYFIKACJA OGÓLNA

Źródło zasilania: wbudowany akumulator 3,7 V DC, 70mAh (0.259WH)
akumulator Li-poly; ładowany przez złącze USB: DC 5V, 100mA

Wersja BT: BLE 4.0/4.1/4.2

Zasięg skuteczny BT: 32 metry na otwartej przestrzeni

Tryb gotowości: 120 godzin

Pamięć danych: 14 dni

AKCESORIA:

instrukcja obsługi x 1

SPECYFIKACJE I AKCESORIA MOGĄ ZOSTAĆ ZMODYFIKOWANE BEZ POWIADOMIENIA

Uwaga!

Konstrukcja produktu i parametry techniczne mogą ulec zmianie bez wcześniejszego powiadomienia. Dotyczy to przede wszystkim parametrów technicznych, oprogramowania oraz podręcznika użytkownika. Niniejszy podręcznik użytkownika służy ogólnej orientacji dotyczącej obsługi produktu. Producent i dystrybutor nie ponoszą żadnej odpowiedzialności tytułem odszkodowania za jakiegokolwiek nieścistości wynikające z błędów w opisach występujących w niniejszej instrukcji użytkownika.

Prawidłowa utylizacja urządzenia.


To oznaczenie informuje, że produktu nie należy utylizować wraz z odpadami z gospodarstw domowych w całej Unii Europejskiej. Aby uniknąć ewentualnych szkód dla środowiska i człowieka spowodowanych niekontrolowaną utylizacją odpadów, należy poddawać je odpowiedzialnemu odzyskowi w celu zadbania o zrównoważone ponowne wykorzystanie surowców materiałowych. Aby zwrócić wykorzystane urządzenie, należy skorzystać z odpowiednich systemów zwrotu i zbiórki odpadów lub skontaktować się ze sprzedawcą urządzenia. W takim punkcie istnieje możliwość poddania wyrobu odzyskowi w sposób bezpieczny dla środowiska.



FCC INFORMATION:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to protect against harmful interference that this equipment generates, uses and can radiate radio frequency energy and, if not used these instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- ~ Reorient or relocate the receiving antenna.
- ~ Increase the separation between the equipment and receiver.
- ~ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ~ Consult the dealer or an experienced radio/TV technician for help.

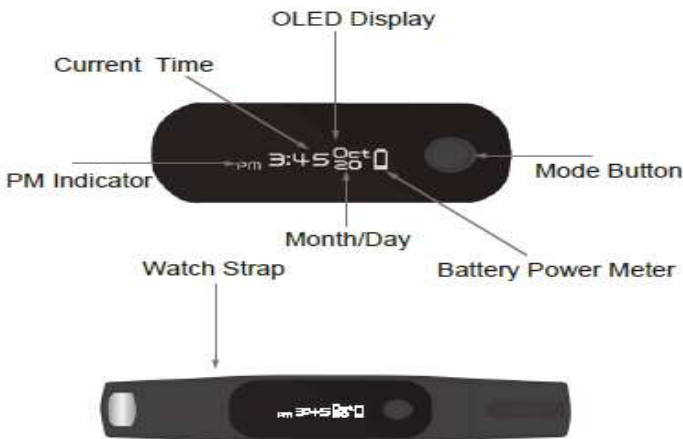LOCATION OF CONTROLS

NOTE: At first time to use, touch and hold the Mode

Button until the display is illuminate to power

POWER SOURCE

The unit has a built-in DC 3.7V, Li-poly rechargeable battery, recharge it before first time use (or when the battery was used up,  appear on the display) as follows:

1. Take out the unit from the watch strap as the figures below illustrate:

A. Take out the unit from the strap on the metallic buckle side as the figure A&B below:

B. Take out the unit completely as the figure C below:



Fig A




Fig B



Fig C

NOTE: Make sure the direction you take out the unit is correct. Otherwise, the unit and strap may get damaged.

2. Insert the USB plug to the USB port on a computer or any USB charger having DC 5V output as the figure below. Make sure gold contact finger of the unit is faced to the USB port's contact. Charging will auto start. During charging, the charging indicator  will appear on the display. When finished, the completed charging indicator "FULL" will appear on the display.



Notes:

Your battery will last longer if you follow simple guidelines for charging and storing below:

- A. Recharge and store the unit within the temperature range of 5°C~35°C (40°F~95°F).
- B. Do not over charge (longer than 24 hours). Excessive charging or discharging may shorten the battery life.
- C. Battery life naturally shortens slowly over time.
- D. It is not recommended that users replace contained rechargeable battery in this product by themselves.

APPS (APPLICATIONS) INSTALLATION

Before first time use, download and install the suitable Apps (Applications) from the apps store as below:

IPhones

If you are using Apple iPhone, download and install Apps from APP Store iPhone APP Section into your iPhone.

Android Phones

If you are using Android phones, download and install the "Isport Tracker" the "IsportTracker" Apps from Google Play Store into your cell phone.

List of Compatible Phones

iPhones (iOS 7.0.0 and above):

iPhone 4S/5/5S/6/6 plus

iPod Touch 5

And newer version iPhone and iPod

Android Phones, Android 4.3 and above

Samsung: Galaxy S4/S5/Note III/IV

LG: Nexus4/5/7

Sony: Xperia C3/E3/T2/ZR/SP/Z/Z1

Moto: E/G/X

And newer version and other brands Android phones, for details, please consult the phone's shop.

ANDROID PHONE:

BT (BLUETOOTH) PAIRING:

In first time use, pairing the unit to your cell phone as below:

1. After installation, find the app I sport Tracker in your phone then open it, the following figure will appear on the screen:



2. Touch the desired button on the screen to enter. Then start to set your personal information into the phone as on the screen instructions as follows:


- ~ Profile: Assign your personal photo into the app.
- ~ Age: Set or reset your age.
- ~ Gender: Set or reset your gender.
- ~ Height: Set or reset your height in inch.
- ~ Weight: Set or reset your weight in lbs.
- ~ Time zone: Set the time zone you are located.

NOTE:

After time zone was set up, all your exercise records will keep in the same time zone even though they were done in other countries. To reset the time zone, you need to uninstall the app from your phone then reinstall again.

3. When finished, touch the “Confirm” Button on the right-top screen to save your settings. The following picture will appear:



4. Touch the  (or your personal picture if set) Button on the screen to enter to Setting menu, the following picture will appear:



5. Touch the “ BT Pairing” Button on the screen to search all available units. The following picture will appear:



6. Touch the “SWT302 1” Button on the screen, the following picture will appear on the screen:



Note: If more than one units are searched, the unit will automatically name it to "SWT302 1", "SWT302 2",etc. Select and touch the correspondence one you desired to start pairing.


7. Touch the "Paired Equipment" Button on the screen to start pairing. When paired, a small " " will pop up on the screen as follows:



IMPORTANT:

~ During pairing, make sure the display of the unit is illuminated. If it is turned off, touch the Mode Button to turn it on again.

~ During pairing, the following warning pages may occur, touch the "Allow" Button to continue pairing

8. Touch the  „SWT302” Button on the screen, the following picture will appear. Touch the desired button on the screen to enter. Then start to set your personal information into the phone as on the screen instructions as follows:



~ Daily Goal: To set or reset the daily goal.

~ Stride: To set or reset the distance of your stride.

~ Wear Way: If you wear the unit on left hand then set it to “Left hand”. If you wear the unit on right hand then set it to “Right hand”.

~ Sedentary Reminder: To set or reset the alarm of the duration you have no motion. NOTE: After setting, make sure you have set the “Switch” to ON to activate the alarm.

~ Alarm Clock: To set or reset the alarm time. (Up to 5 alarm time can be set.)

Notes: When alarm goes off, touch the Mode Button on the unit to shut it off.

~ Real Time Synchronization: To activate or turn off the Real Time Synchronization function.

~ UnPaired: Unpaired the unit and phone.

9. After setting, touch the “<Back” Button on the screen twice to return to home page.

10. At home page, slide the picture downward to start synchronization. After synchronization, the current time as the phone will auto sent into the unit.

IMPORTANT: During synchronization, make sure the display of the unit is illuminated. If it is turned off, touch the Mode Button to turn it on again.


OPERATIONS

iPhone:

BT (BLUETOOTH) PAIRING:

In first time use, pair the unit to your iPhone as below:

1. After installation, find the app Isport Tracker r in your iPhone then open it, the following figure will appear on the screen:

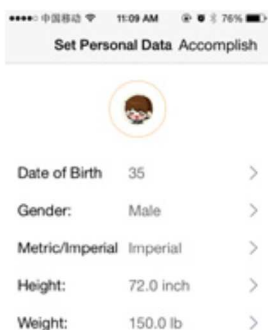

2. Touch the desired button on the screen to enter. Then start to set your personal information into the iPhone as the on-screen instructions as follows:

~ ~Date of Birth: Set or reset your age.

~ Imperial/Metric: Set imperial/metric unit.

~ Gender: Set or reset your gender.


~ Height: Set or reset your height in inch.


~ Weight: Set or reset your weight in lbs.

NOTES: Imperial/metric can't be changed once saved.

Photo: Assign your personal photo into the app

3. When finished, touch the "Accomplish" Button on the right-top corner on the iPhone's screen. The following picture will appear. Touch the SWT302 Button to start connecting. When paired, green "Connecting" will appear on the screen. Touch the Next

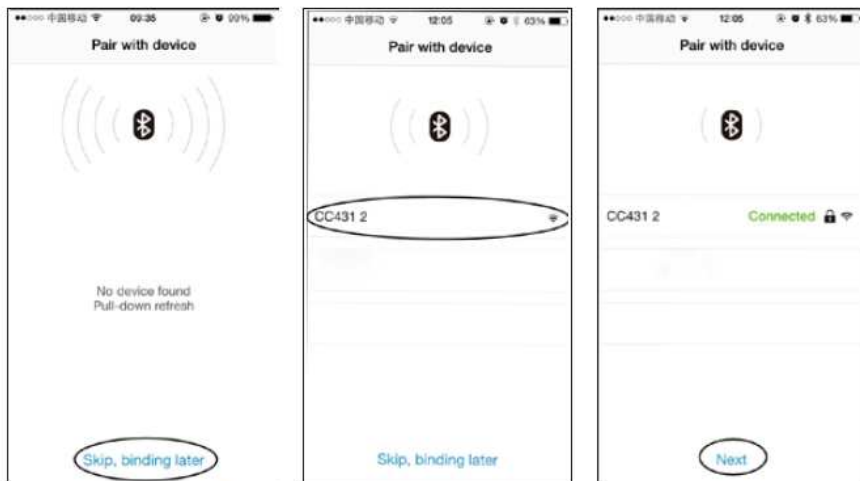


4. Touch the Button  (Or your personal picture if set) on the unit to enter, the following figure will appear on the screen:





5. Touch the “ Paired with hardware” Button on the screen to read the information of the BT connected device or touch the Unpair Button to disconnect the BT connection. Touch the “< back” Button three times to exit to main page.

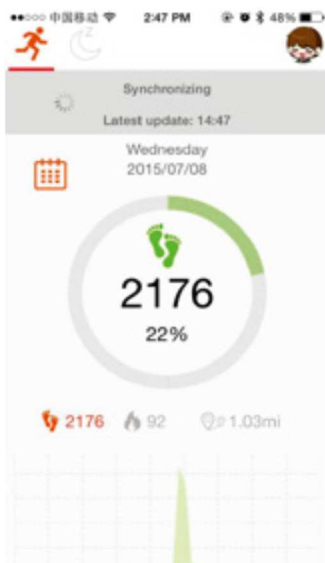

6 . On main page, slide the picture on the screen downward to start pairing. After paired, touch the "< back" Button on the screen, the follows picture will occur.



Note: If more than one units are searched, the unit will automatically name it to "SWT302 1"; "SWT302 2"etc. Select and touch the correspondence one to start pairing.

7. Touch the  Button (or the personal picture if set) again then touch the  "Activity Tracker" Button on the screen, the following picture will appear. Touch the desired button on the screen to enter. Then start to set your personal information into the iphone as the on screen instructions as follows:

~ Daily Goal: To set or reset the daily goal.

~ Stride: To set or reset the distance of stride.

~ Wear Way: If you wear the unit in left hand then set it to "Left hand". If you wear the unit in right hand then set it to "Right hand".

~ Sedentary Reminder: To set or reset the alarm of the duration you have no movement. NOTES:

After setting, make sure you have set the

"Switch" to ON to activate the alarm. When alarm goes off, touch the Mode Button on the unit to shut it off. desired button on the screen to enter. Then start to set your personal information into the iphone as the on screen instructions as follows: Touch the " " Button (or the personal picture if set)



~ Vibration Alarm: To set or reset the alarm. (Up to 5 alarm time can be set).

NOTES: After setting, make sure the switch on the right of screen was turned to ON then touch the Save Button on the right-top of screen to save the settings. Otherwise, alarm will not activate. When alarm goes off, touch the Mode Button on the unit to shut it off.

~ Real Time Synchronization: To activate or turn off the Real Time Synchronization function.

~ UnPaired: Unpaired the unit and phone.

8. After setting, touch the "<back" Button on the screen twice to return to home page.

9. In home page, slide the picture downward to start synchronize.

IMPORTANT: During synchronization, make sure the display of the unit is illuminated. If it is turned off, touch the Mode Button to turn it on again. Every times when you finished set or reset the data, make sure you were done the synchronize. Otherwise, nothing changed.

CHECK AND READ THE RECORDS

After you've done the exercise, you can check and read the records as follows:

Unit:

1. Touch the Mode Button on the unit repeatedly to read the records and time as below:



Time



Number of steps



Burned calorie



Distance




Exercise Time



Goal completed meter




Goal completed level
in percentage



Alarm



Reminder for
no motions



Name and Phone number
for incoming call (Operation
in Android phones only)



Numbers of missing
calls (Operation in
Android phones only)

Auto
changed



Unread messages
(Operation in Android
phones only)


Phone:

1. Touch the Mode Button on the unit to turn on the display. Pairing the unit to the phone as previous procedures.
2. After paired the unit to the phone. Enter to home page, the follows picture will appear on the phone screen.

3. Slide the picture on the phone downward to start synchronization.

IMPORTANT: During synchronization, make sure the display of the unit is illuminated. If it is turned off, touch the Mode Button to turn it on again.

4. After synchronization, touch the correspondence button on the phone screen or slide the picture to left, right or downward to read the records.

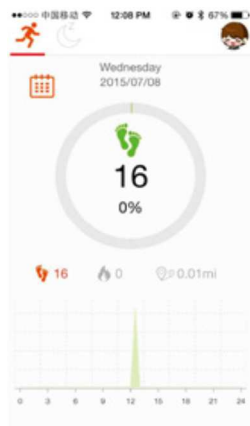


SLEEP MONITOR

To monitor and count your sleep time:


1. When start sleeping, touch the Mode Button on the unit to turn on the display mode.
2. Press the Mode button again to exit from the main time display. (Note: To avoid sleep monitor active accidentally.

Sleep monitor mode is not allowed to be set in the main time display mode.)

3. Press and hold the Mode Button approximate 5 seconds to enter sleep mode, the following picture will appear on the unit's display. Sleep counter will activate.



4. When wake up, touch the Mode Button on the unit to turn on the display.
5. Press the Mode Button again to exit from the main time display mode.
6. Press and hold the Mode Button approximate 5 seconds to exit from sleep monitor mode, the following picture will appear on the unit's display



7. A few seconds later, the main time display mode will appear. seconds to exit from sleep monitor mode, the following picture will appear on the unit's display.

IMPORTANT

2. Please always wear the unit on your hand and turn it
1. Every time when you set or reset the information, you MUST synchronize the new information into your unit again. Otherwise, nothing will be changed on. Otherwise, the calculation will be incorrect.
- 3 . During the sleeping period, the step counter will NOT operate.
4. Always synchronize the records from the unit to your smartphones. Otherwise, the past 14th day's record in the unit will be erased automatically.

GENERAL SPECIFICATION

Power Source: Built-in DC 3.7V, 70mAH (0.259WH)

Li-poly rechargeable battery; Recharge by DC 5V, 100mA, through USB contact

BT Version:

BT Effective Range:

Battery Power in Standby Mode:

BLE 4.0/4.1/4.2

32 Feet in open area.

120 Hours

Record Keeping: 14 Days

ACCESSORY:

1 x User's Manual

SPECIFICATIONS AND ACCESSORIES ARE SUBJECT TO CHANGE WITHOUT NOTICE

**Correct Disposal of this product.**

This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Note!

Product design and Technical parameters may be change without notice. This mainly concerns parameters technical, software and user manual present. User's Manual is a general orientation on service product. Manufacturer and distributor do not assume any responsibility as compensation for any inaccuracies errors in the descriptions appearing in this user manual.

NOTATKI / NOTES



MANTA

INFOLINIA SERWISOWA

tel: +48 22 332 34 63 lub e-mail: serwis@manta.com.pl
od poniedziałku do piątku w godz. 9.00-17.00

Producent zastrzega sobie możliwość wprowadzenia zmian w specyfikację produktu bez uprzedzenia.

Strona główna www.manta.com.pl
Strona wsparcia technicznego www.manta.info.pl

SERVICE INFOLINE

tel: +48 22 332 34 63 or e-mail: serwis@manta.com.pl
from Monday to Friday, 9.00-17.00

The manufacturer reserves the right to make changes to product specifications without notice.

Home: www.manta.com.pl
Home support: www.manta.info.pl



Made in P.R.C.
FOR MANTA EUROPE